



| REVISIONS |                              |         |          |
|-----------|------------------------------|---------|----------|
| REV       | DESCRIPTION                  | DATE    | APPROVED |
| 1         | add callout for gold plating | 9/18/13 |          |
|           |                              |         |          |
|           |                              |         |          |
|           |                              |         |          |

Finish Gold Plated per Mil-G45204C Class C

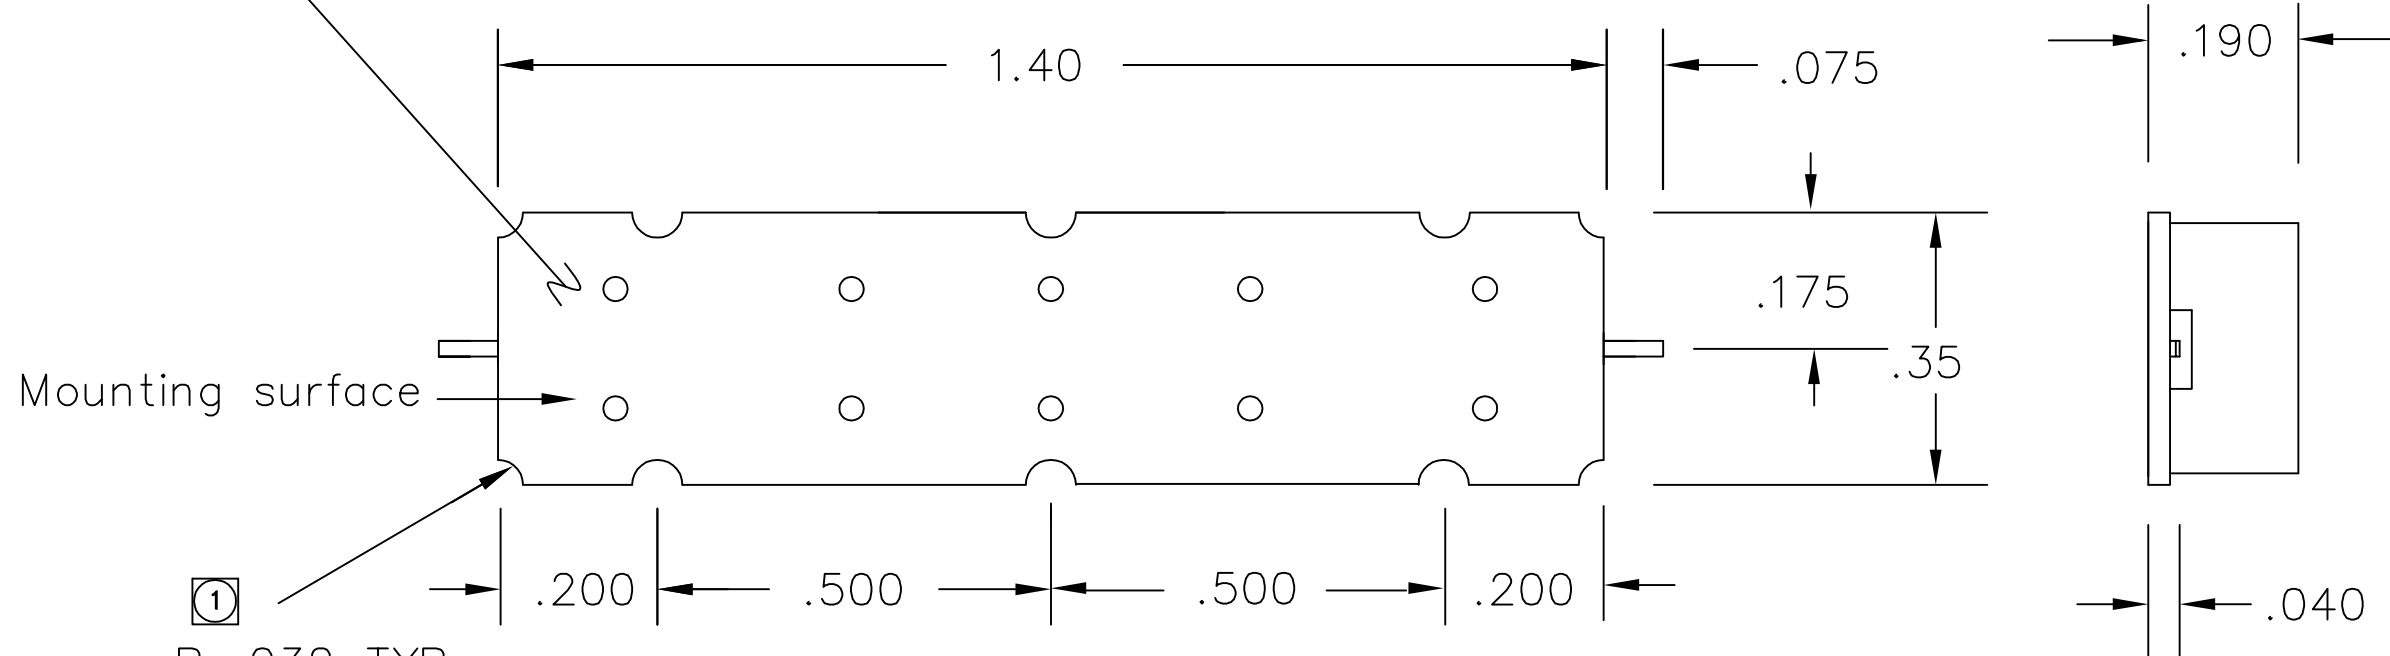

① R .032 TYP  
10 PL  
(PLATED THRU)

.020x.002 AG ribbon tinned in SN63 solder (2 Pls)

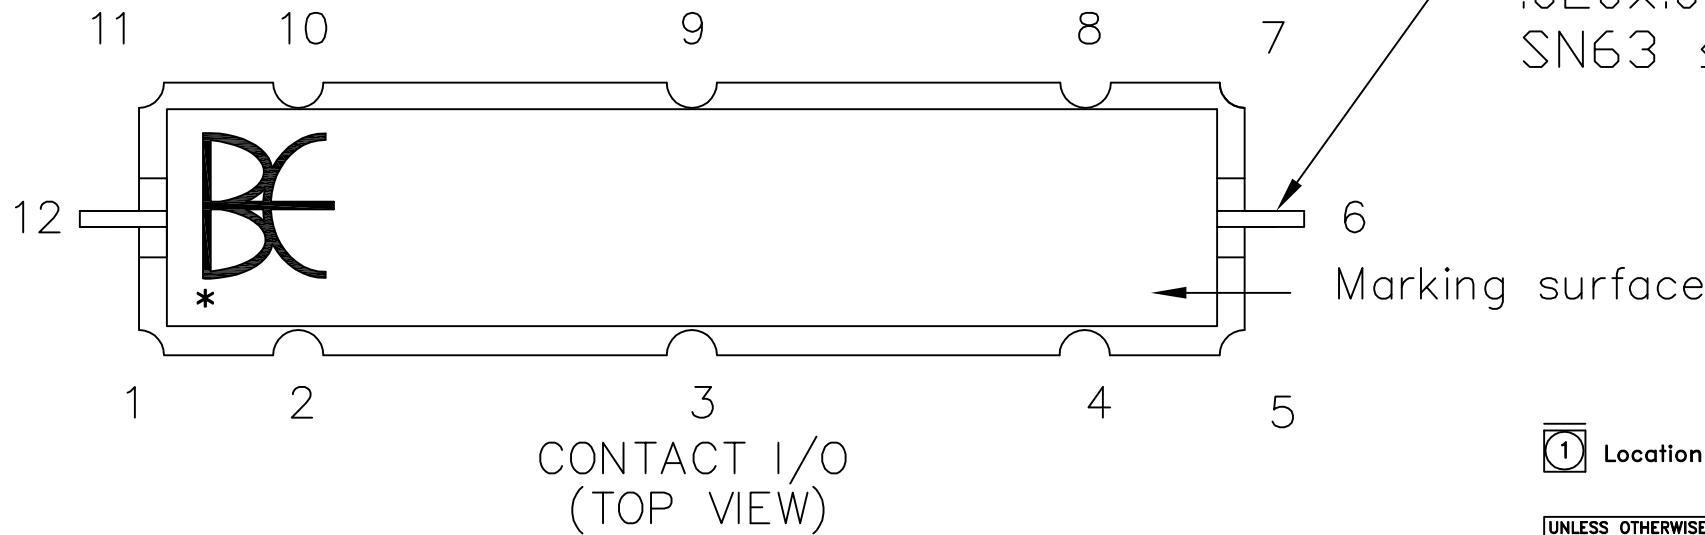

① Location of plated thru holes are to be held at +/- .005.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BREE ENGINEERING. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF BREE ENGINEERING IS PROHIBITED.

|  |  |             |   |
|--|--|-------------|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES & TOLERANCES ARE:<br>.XXX .XX ANGLES<br>±.005 ±.01 | CAD GENERATED DRAWING DO NOT MANUALLY UPDATE |             | BREE ENGINEERING                              |
|  | DWN LN                                       | DATE 9/4/13 |   |
| MATERIAL Nelco 4000-13-EP Gold Plated per Mil-G-45204C Class C   | CHK BE                                       | DATE 9/4/13 | OUTLINE                                       |
|  | RESP ENG                                     |             |   |
| MATERIAL 1/4 to 1/2 HD 770 .010 THK  | MFG ENG                                      |             | SIZE CAGE CODE DWG NO REV<br>B 1K3H5 700228 1 |
|  | QUAL ENG                                     |             |   |
| Scale for REFERENCE ONLY   |  |             | SHEET 1 OF 1                                  |