


10 Mar 2016 15:26:29

CH1 S11 LOG 5 dB/REF 0 dB  
 CH2 S12 LOG 10 dB/REF 0 dB

4:-27.900 dB 980.000 000 MHz  
 4:-68.238 dB

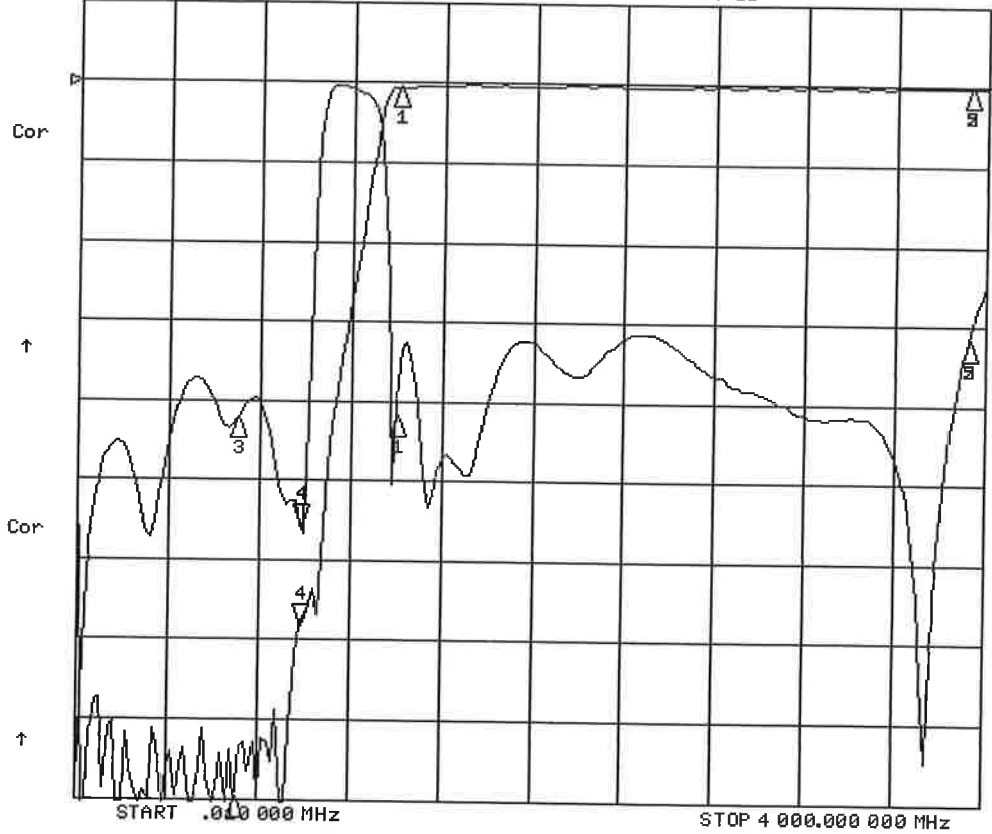

CH1 Markers

- 1:-21.000 dB  
1.39600 GHz
- 2:-16.010 dB  
3.92000 GHz
- 3:-21.116 dB  
698.000 MHz
- 5:-16.010 dB  
3.92000 GHz

CH2 Markers

- 1:-55.430 dB  
1.39600 GHz
- 2:-21.660 dB  
3.92000 GHz
- 3:-89.970 dB  
698.000 MHz
- 5:-21.660 dB  
3.92000 GHz



Bree Engineering 1K3H5

P/N 802857 CH2

S/N 3215-1 3

BY: Angel DATE: 3-10-16

CH 2	Parameter	Specification	Units	Limit	Reading
	Cutoff Frequency	1396	MHz	typ	
	Insertion Loss (1396 to 3920 MHz)	1.1	dBa	max	<u>1.56</u>
	Return Loss (1396 to 3920 MHz)	14	dB	min	<u>15.70</u>
	Rejection				
	698 to 980 MHz	60	dBc	min	<u>71.37</u>